



Connection diagram WLED LAN Controller V1.2 with Direct OUT module, WS281x / SK6812 / etc., 5-24V

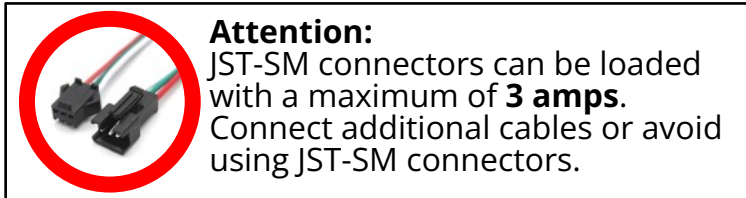

Secure additional feed points
with WLED Fused Capacitor
Board. (90062)

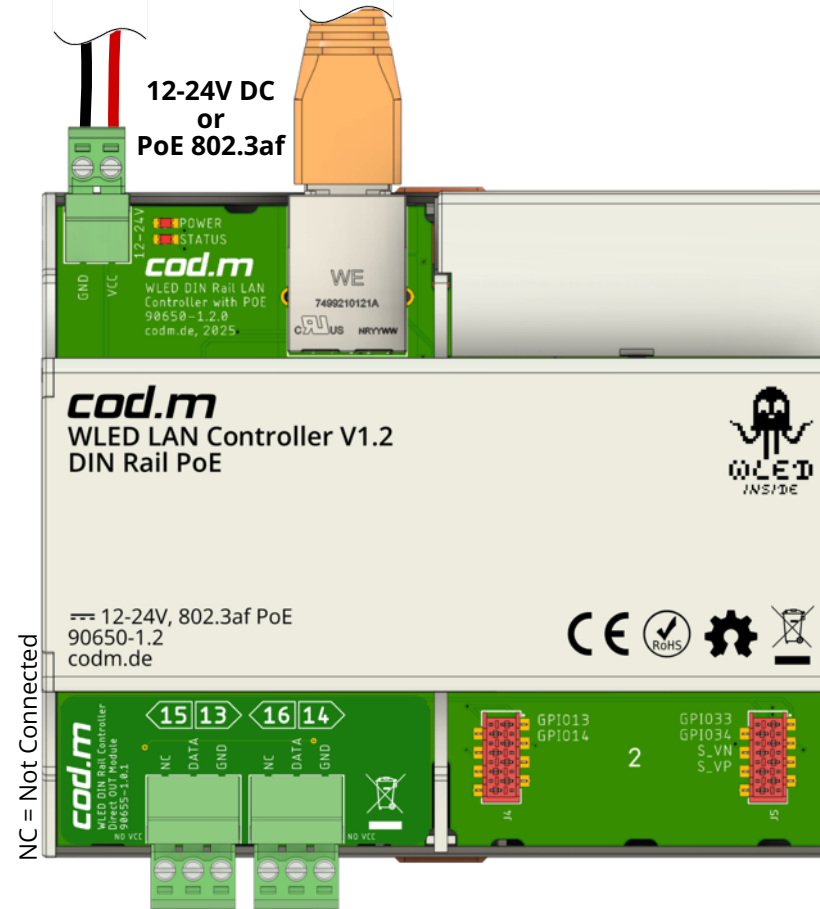

Data cable
max. 2m



cod.m WLED Fused Range Extender OUT
90066, 5-24V, max 10A,
Select fuse according to installation!

5-24V
Dimension the power
supply according to
the power Requirement!

Choose conductor according
to power requirements

WS281x / SK6812 / etc. (5-24V)



cod.m

cod.m GmbH 2025 , V1.0, <https://docs.codm.de>